



Industrial Grade AC/DC Power Supply With PFC

85-264Vrms Input Voltage	12/15/24/28/48V Semi-Regulated Output	800W Output Continuous	1000W Output Transient	93% Full Load Efficiency
-----------------------------	--	---------------------------	---------------------------	-----------------------------



ACuQor[®]

Product Features

- High efficiency (93% for 48 VOUT Model at 800W)
- Universal input voltage range
- Semi-regulated output for bus stability
- Integral fan cooling with speed control
- Active PFC; EN61000-3-2 compliant
- Low noise; EN55011 / EN55022 Class B compliant
- Over-current, over-voltage, & over-temp protection
- DC Power Good / AC Power Good signals
- Fan status output / Remote enable input
- Small size: 4.75" x 7" x 1.625" (encased)
- RoHS 6/6 compliant
- 5 V (500 mW) standby output



AC Input: 85-264Vrms
DC Output: 12/15/24/28/48V
Power: 800W
Grade: Industrial

ACuQor 800W Series Electrical Characteristics

All specifications typical with TA = 25 °C, unless otherwise specified. Specifications subject to change without notice.

MAIN OUTPUT SPECIFICATIONS		
Output power (continuous) (5 s transient)	85-132/170-264 Vrms	800W
	85-132/170-264 Vrms	1000W
Nominal DC output voltage (at 800W) (Semi-regulated)	132-170 Vrms	See Figure 12
	12 Vout	12.4 V
	15 Vout	15.6 V
	24 Vout	25 V
	28 Vout	29 V
Efficiency (see figs. 1 - 10)	48 Vout	50 V
	12 Vout, 115 Vrms, 800W	90% typ.
	24 Vout, 115 Vrms, 800W	91% typ.
	48 Vout, 115 Vrms, 800W	92% typ.
	12 Vout, 230 Vrms, 800W	91% typ.
Hold-up time (to -20%)	24 Vout, 230 Vrms, 800W	92% typ.
	48 Vout, 230 Vrms, 800W	93% typ.
	12 / 15 Vout	20 ms @ 800W
	24 / 28 / 48 Vout	24 ms @ 800W
	Maximum load capacitance	12 Vout
15 Vout		40,500 µF
24 Vout		24,000 µF
28 Vout		19,200 µF
48 Vout		6,000 µF
Output ripple voltage	Switching frequency (20 MHz BW)	0.5% p-p
	Twice line frequency (at 800W)	5.0% p-p
Turn-on delay		2 s max.
Transient response	Iout steps from 50-75% At 0.2 A/µs	3% typ / 6% max. dev. 100 ms recovery
Overvoltage protection	Cyclic restart	110-120%
Short circuit protection	Cyclic operation	115% rated Iout
Total regulation	Over line, load and temperature	±6.0%
Auxiliary Output	Always on (See Note 1)	5 V @ 100 mA
Thermal protection	Automatic recovery	+125 °C (PCB Temp)
REMOTE_ENABLE	Input Low Voltage	0.45 V (max)
	Input High Voltage	4.15 V (min)
INPUT SPECIFICATIONS		
AC input voltage	Universal range	85-264 Vrms
Input frequency		47-63 Hz
Input current	115 Vrms @ 800W	8 Arms
	230 Vrms @ 800W	4 Arms
Power factor		>0.98
Input surge current	264 Vrms (cold start)	50 A max.
Internal input fuses	Both AC lines	20 A

GENERAL SPECIFICATIONS		
Fundamental ripple freq.	Input	500 kHz
	Output	250 kHz
Audible noise	Fan speed varies with temp.	45 dBA @ 1 m max.
Weight	(AQ0800xxxxGC)	998 g (35.2 oz)
	(AQ1100xxxxGC)	1179 g (41.6 oz)
	(AQ1400xxxxGC)	1179 g (41.6 oz)
MTBF	MIL-217	533 kHours
	Demonstrated	TBD kHours
ISOLATION SPECIFICATIONS		
Isolation voltage	Input to output	3000 Vrms
	Input to ground	1500 Vrms
	Output to ground	500 Vrms
Insulation resistance	Output to ground	10 MΩ min.
Leakage currents		See Note 2
ENVIRONMENTAL CHARACTERISTICS		
Thermal performance	Operating ambient (see Figure 11)	-40 °C to +70 °C
	Non-operating ambient	-40 °C to +85 °C
Relative humidity	Non-condensing	5-95% RH
Altitude	Operating	10,000 ft max.
	Non-operating	30,000 ft max.
Random vibration	5-500 Hz	0.03 g2/Hz
Shock	Half-sine, 10 ms, 3 axes	20 g peak
EMC CHARACTERISTICS		
Conducted emissions	EN55011 and EN55022, FCC part15	Level B
Line frequency harmonics	EN61000-3-2	Class A
Voltage fluctuations	EN61000-3-3	Clause 5b
ESD air	EN61000-4-2	Level 3
ESD contact	EN61000-4-2	Level 3
Radiated immunity	EN61000-4-3	Level 3
Fast transients	EN61000-4-4	Level 3
Line surge immunity	EN61000-4-5	Level 3
Conducted immunity	EN61000-4-6	Level 3
Power freq. mag. field	EN61000-4-8	3 A/m
Voltage dip immunity	EN61000-4-11	Perf Criteria A, A, B <5% UT 10 ms,

NOTES:

- Derate 2 mA per °C above 50 °C ambient temperature.
- Leakage currents see page 4.

SAFETY AGENCY CERTIFICATIONS

CAN/CSA-C22.2 No. 60950-1:2007

UL 60950-1:2007

EN 60950-1/A1:2010

CE Marked



EFFICIENCY, DERATING, AND V_{out} DROOP CURVES

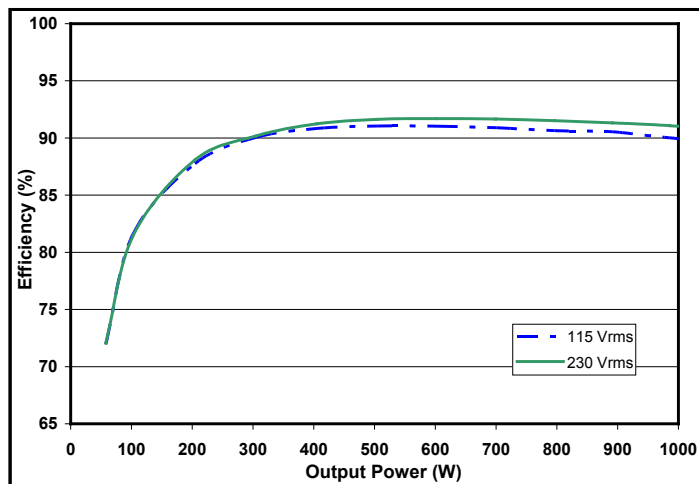


Figure 1: 12 VOUT efficiency curves.

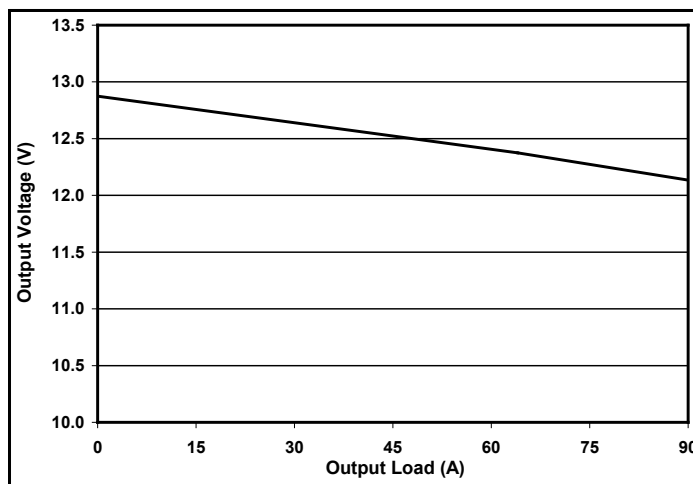


Figure 2: 12 VOUT droop characteristic.

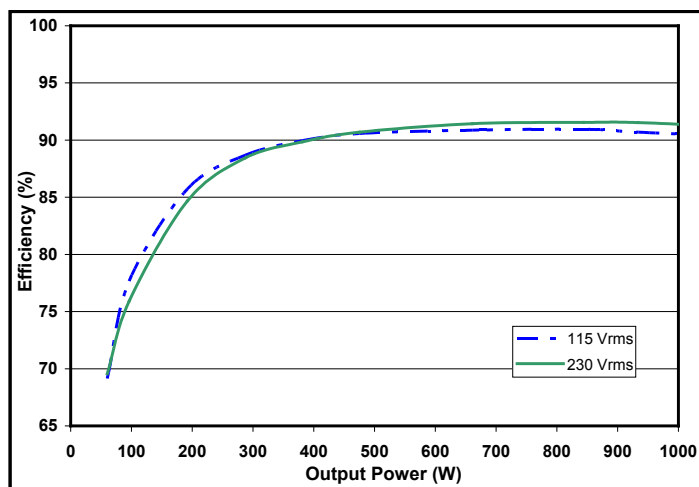


Figure 3: 15 VOUT efficiency curves.

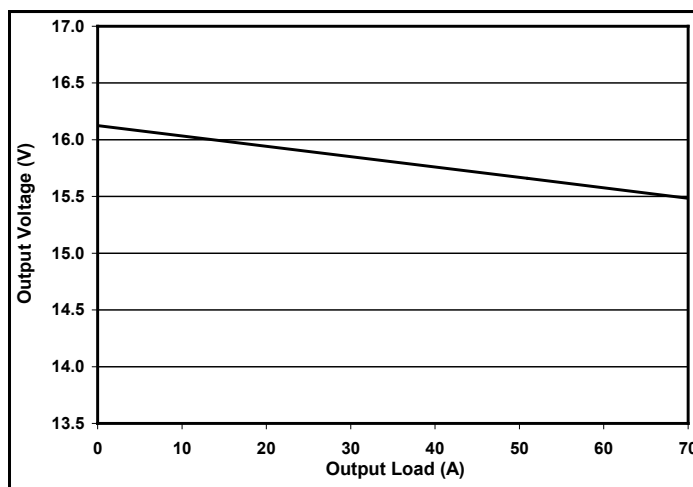


Figure 4: 15 VOUT droop characteristic.

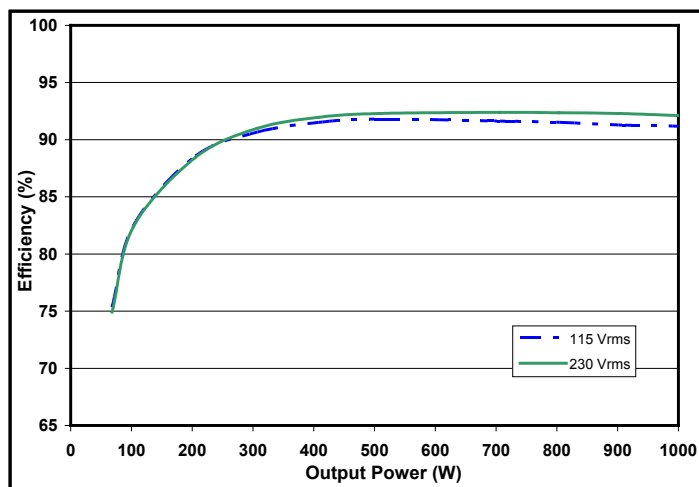


Figure 5: 24 VOUT efficiency curves.

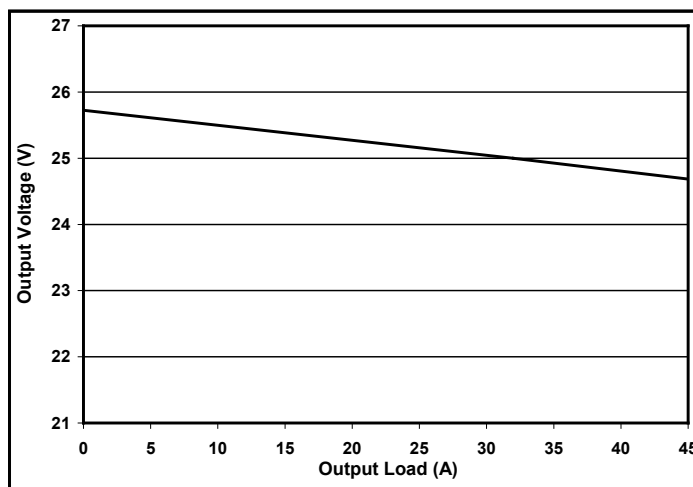


Figure 6: 24 VOUT droop characteristic.

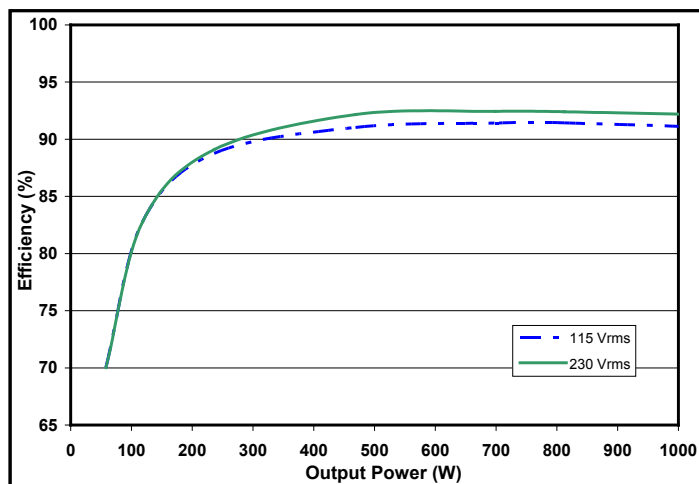


Figure 7: 28 VOUT efficiency curves.

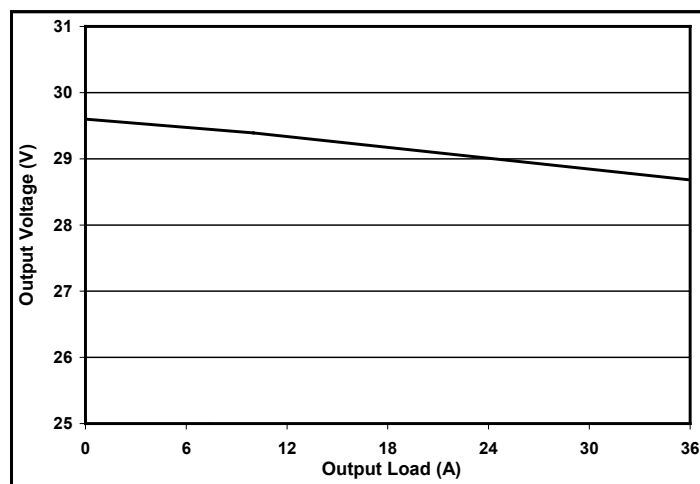


Figure 8: 28 VOUT droop characteristics.

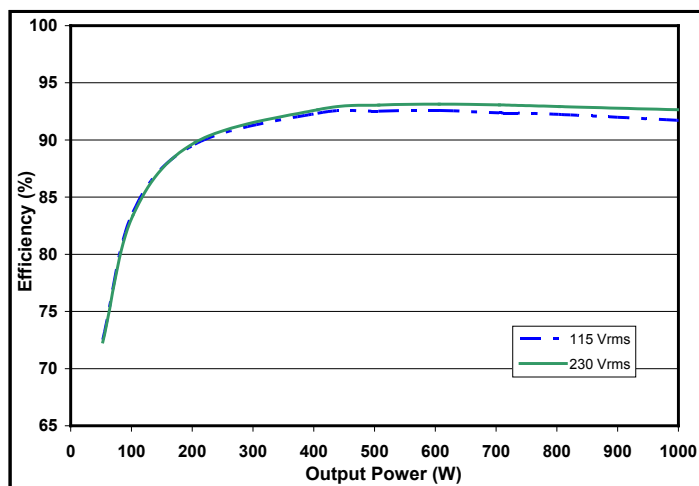


Figure 9: 48 VOUT efficiency curves.

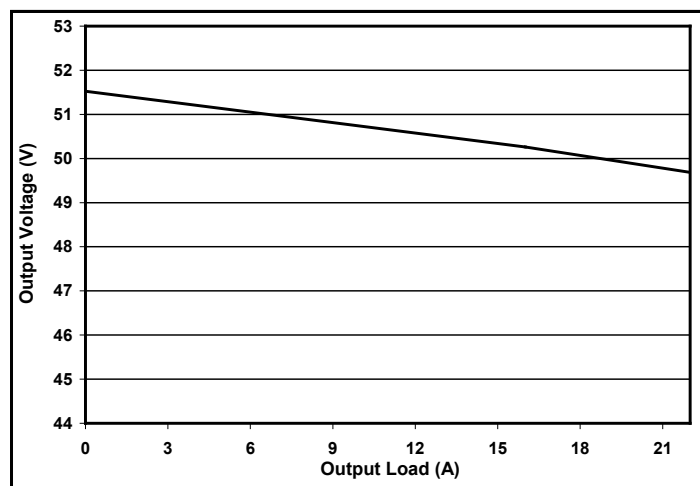


Figure 10: 48 VOUT droop characteristics.

AC Leakage Current from Input to Earth	AC Line Connection	Normal Condition	Open Neutral Fault
ACuQor Typical at 110% nominal input voltage 60 Hz	240 V L-N, 1 phase	400 μ A	800 μ A
	208 V L-L, 120 V L-N, 1 of 3 phases	200 μ A	400 μ A
	240 V L-N-L, 120 V L-N, split phase	200 μ A	400 μ A

Table 1: Leakage Currents



AC Input: 85-264Vrms
DC Output: 12/15/24/28/48V
Power: 800W
Grade: Industrial

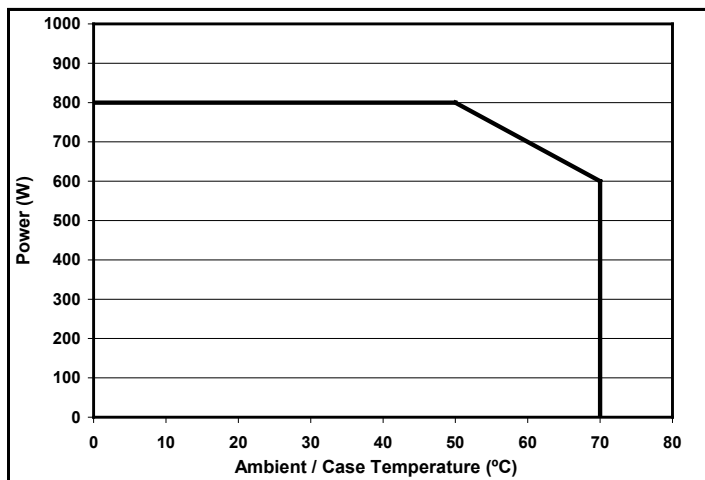


Figure 11: Continuous power derating curve in natural convection.



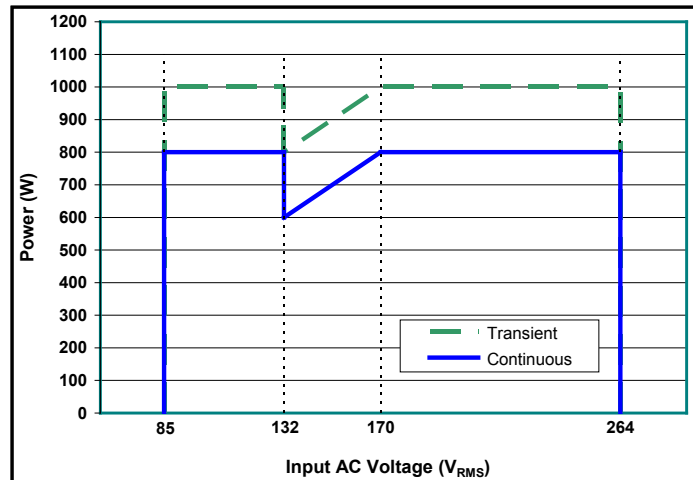


Figure 12: Rated output power vs Input AC Voltage.



OUTPUT DATA CONNECTOR PINOUT

Pin 1	Reserved	Reserved for future use.
Pin 2	Reserved	Reserved for future use.
Pin 3	VOUT(-)	Negative Output Voltage
Pin 4	REMOTE_ENABLE	Logic input. See Figure B. Pull high to enable main output.
Pin 5	FAN_GOOD	Open collector with internal 5 V pullup. See Figure A. Pulsed low on fan failure, 100 ms, 50% duty.
Pin 6	AC_POWER_GOOD	Open collector with internal 5 V pullup. See Figure A. Pulled low on AC power dropout.
Pin 7	DC_POWER_GOOD	Open collector with internal 5 V pullup. See Figure A. Pulled low during startup ramp and within 5°C of temperature shutdown threshold.
Pin 8	5V_STANDBY	5 V @ 100 mA available whenever AC power is applied.



OUTPUT POWER CONNECTOR PINOUT

Pin 1	VOUT(+)	Positive Output Voltage
Pin 2	VOUT(-)	Negative Output Voltage
Pin 3	VOUT(+)	Positive Output Voltage
Pin 4	VOUT(-)	Negative Output Voltage
Pin 5	VOUT(+)	Positive Output Voltage
Pin 6	VOUT(-)	Negative Output Voltage
Pin 7	VOUT(+)	Positive Output Voltage
Pin 8	VOUT(-)	Negative Output Voltage



INPUT CONNECTOR PINOUT

Pin 1	Ground
Pin 2	AC Neutral
Pin 3	AC Line

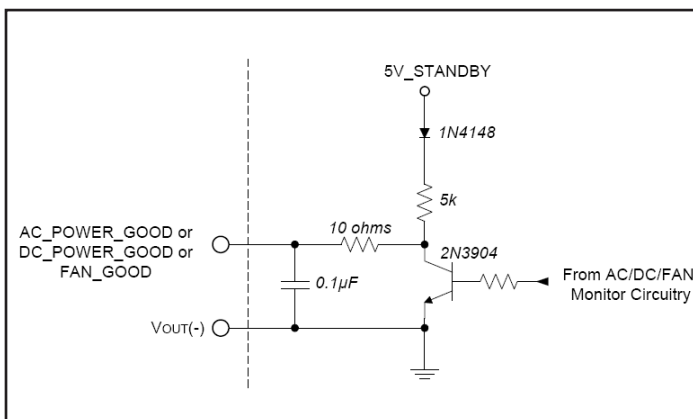


Figure A: Power good and fan good interface circuitry.


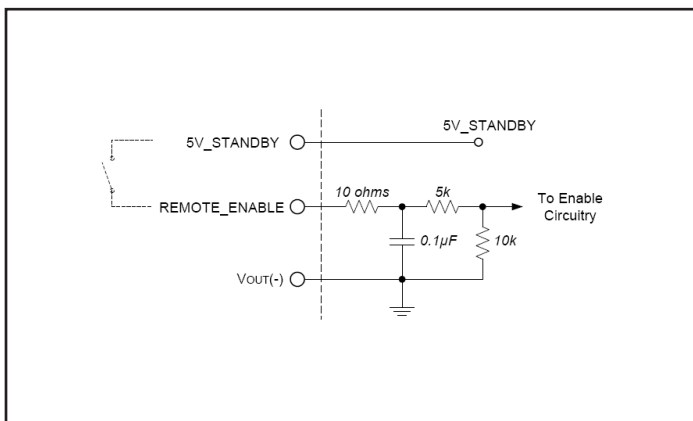



Figure B: Remote enable interface circuitry.

MATING CONNECTORS

Connector	Type	Contact
OUTPUT (Power)	Positronic PLA08M7	Positronic MS112N
OUTPUT (Data)	Molex 43025-0800	Molex 43030-0008
INPUT	Hirose DF22B-3S-7.92C	Hirose DF22A-1012SC

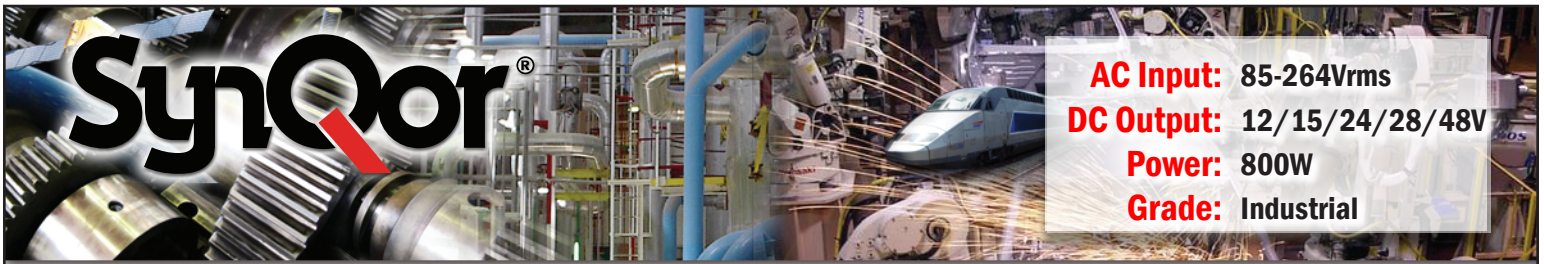

MECHANICAL DRAWINGS

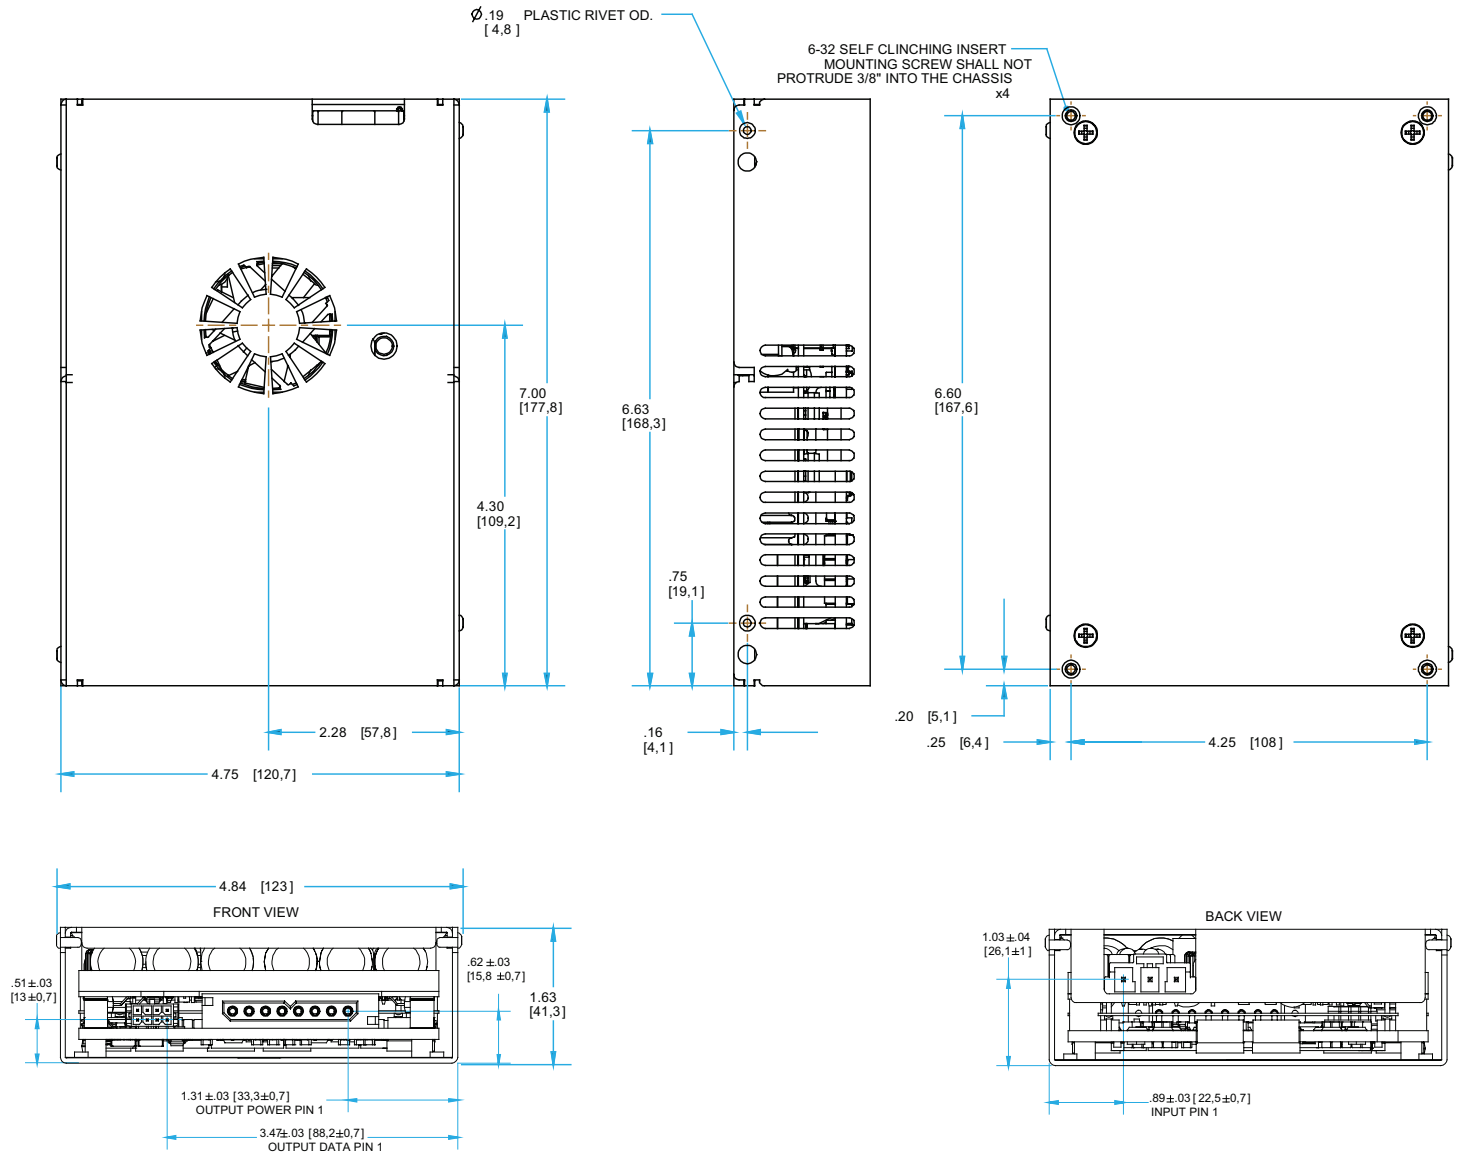

NOTES

1. Recommended screw tightening torque of 6in.. lbs.
2. Undimensioned components are shown for visual reference only
3. All dimensions in inches [mm]
Tolerances: x.xx in $\pm$ 0.02
x.xxx in $\pm$ 0.010



INSTALLATION INSTRUCTIONS

GENERAL INFORMATION: ACuQor AC/DC power supplies are intended for use as components in medical and industrial equipment. ACuQor units must be properly installed within end use equipment before they can be safely applied as described in this document. The suitability of the ACuQor/equipment combination must be verified through end product investigation.

MOUNTING: Refer to the Mechanical Drawings section. ACuQor units are provided with threaded stainless-steel stand-offs or inserts for mounting. This mounting hardware is internally connected to the input connector protective-earth terminal for functional-earth EMC control. Any orientation (vertical, horizontal, etc.) may be used. Adequate air space should be provided over the fan intake (top) and exhaust (sides) to allow for exchange of cooling air. ACuQor is designed for a pollution degree 2 environment. A minimum of 5 mm electrical clearance should be allowed from the connector ends of encased models.

INPUT: Refer to the Connector Details section for input connector wiring. ACuQor products require a single phase AC power source of 100-240V 50/60Hz nominal. Refer to nameplate label for input current ratings. A protective-earth connection is also required. Minimum wire size of 14 AWG (2.5mm²) is recommended. Both sides of the AC line are internally fused (see table for specific models). These fuses are not user replaceable.

OUTPUT: Refer to the Connector Details section for the output connector wiring and signal I/O functionality. Refer to nameplate label for output current ratings. Main DC output (Vout+, Vout-) pins should use 12 AWG (4.0mm²) wire size. Individual main output pins should not be loaded to more than 30 A. For currents greater than 30 A, multiple main output pins/wires must be used in parallel. All signal I/O pins are referenced to Vout-.

EMC: ACuQor products have been tested to the EMC specifications listed in the section of this datasheet titled Electrical Characteristics, on page two. However, end use equipment must be tested to verify EMC compliance.

HIPOT TESTING: ACuQor products are rated for Hipot testing levels of 1500 Vac input to protective-earth, 500 Vac output to protective-earth, and 3000 Vac input to output. When performing the 3000 Vac input to output test, the test voltage must be balanced evenly 1500 Vac input and output to protective-earth. Two oppositely phased test voltage sources or a single test voltage source with external balancing impedances (capacitors) may be used to prevent overstressing input or output to protective-earth insulation per IEC/EN 60950-1.

MODEL	Input Fuses (in Both AC Lines)	Fuses Total
AQ0800	Cooper Bussmann 20A 250V GBB-20	2
AQ1100	Cooper Bussmann 20A 250V GBB-20	2
AQ1400	Cooper Bussmann 20A 250V GBB-20	2

Table 2: AC line fuse for specific ACuQor Industrial Models



PART NUMBERING SYSTEM

The part numbering system for SynQor's ACuQor AC/DC power supplies follows the format shown in the table below. Not all combinations make valid part numbers, please contact SynQor for availability.

Family	Output Power	Grade	Range	Output Voltage	Package Type	Thermal Design	Options
AQ: ACuQor series of AC-DC semi-regulated output power supplies	0800: 800W 1100: 1100W 1400: 1400W	M: (Medical) I: (Industrial)	U: Universal (85-264 VRMS)	12: 12V 15: 15V 24: 24V 28: 28V 48: 48V	G: 1 unit (5"x7")	C: Encased	Medical Grade B: B isolation rating BF: BF isolation rating CF: CF isolation rating CFD: CF isolation rating defibrillator proof IND: Industrial Grade

Example: AQ0800IU24GCIND

ACCESSORIES

SynQor offers a series of assemblies that can be ordered according to the table below. Mechanical drawings for these accessories are available for download in pdf format from the SynQor website.

Part Number	Description
AQ-CBL-INPUT1CG	Input mating cable with pre-stripped wire ends (36" long)
AQ-CBL-OUT1CDG	Output mating cables (Signal and Power) with pre-stripped wire ends (18" long)

APPLICATION NOTES

A variety of application notes and technical white papers can be downloaded in pdf format from the SynQor website.

[Online Application Notes](#)

[Online Library of Technical White Papers](#)

[SynQor website.](#)

PATENTS

SynQor holds numerous U.S. patents, one or more of which apply to most of its power converter products. Any that apply to the product(s) listed in this document are identified by markings on the product(s) or on internal components of the product(s) in accordance with U.S. patent laws. SynQor's patents include the following:

5,999,417	6,222,742	6,545,890	6,594,159	6,731,520	6,894,468
6,896,526	6,927,987	7,050,309	7,072,190	7,085,146	7,119,524
7,269,034	7,272,021	7,272,023	7,558,083	7,564,702	7,765,687
7,787,261	8,023,290	8,149,597	8,493,751	8,644,027	9,143,042

Contact SynQor for further information and to order:

Phone: **978-849-0600**
 Toll Free: **888-567-9596**
 Fax: **978-849-0602**
 E-mail: **power@synqor.com**
 Web: **<http://www.synqor.com/>**
 Address: **155 Swanson Road**
Boxborough, MA 01719
USA

Warranty

SynQor offers a two (2) year limited warranty. Complete warranty information is listed on our website or is available upon request from SynQor.